


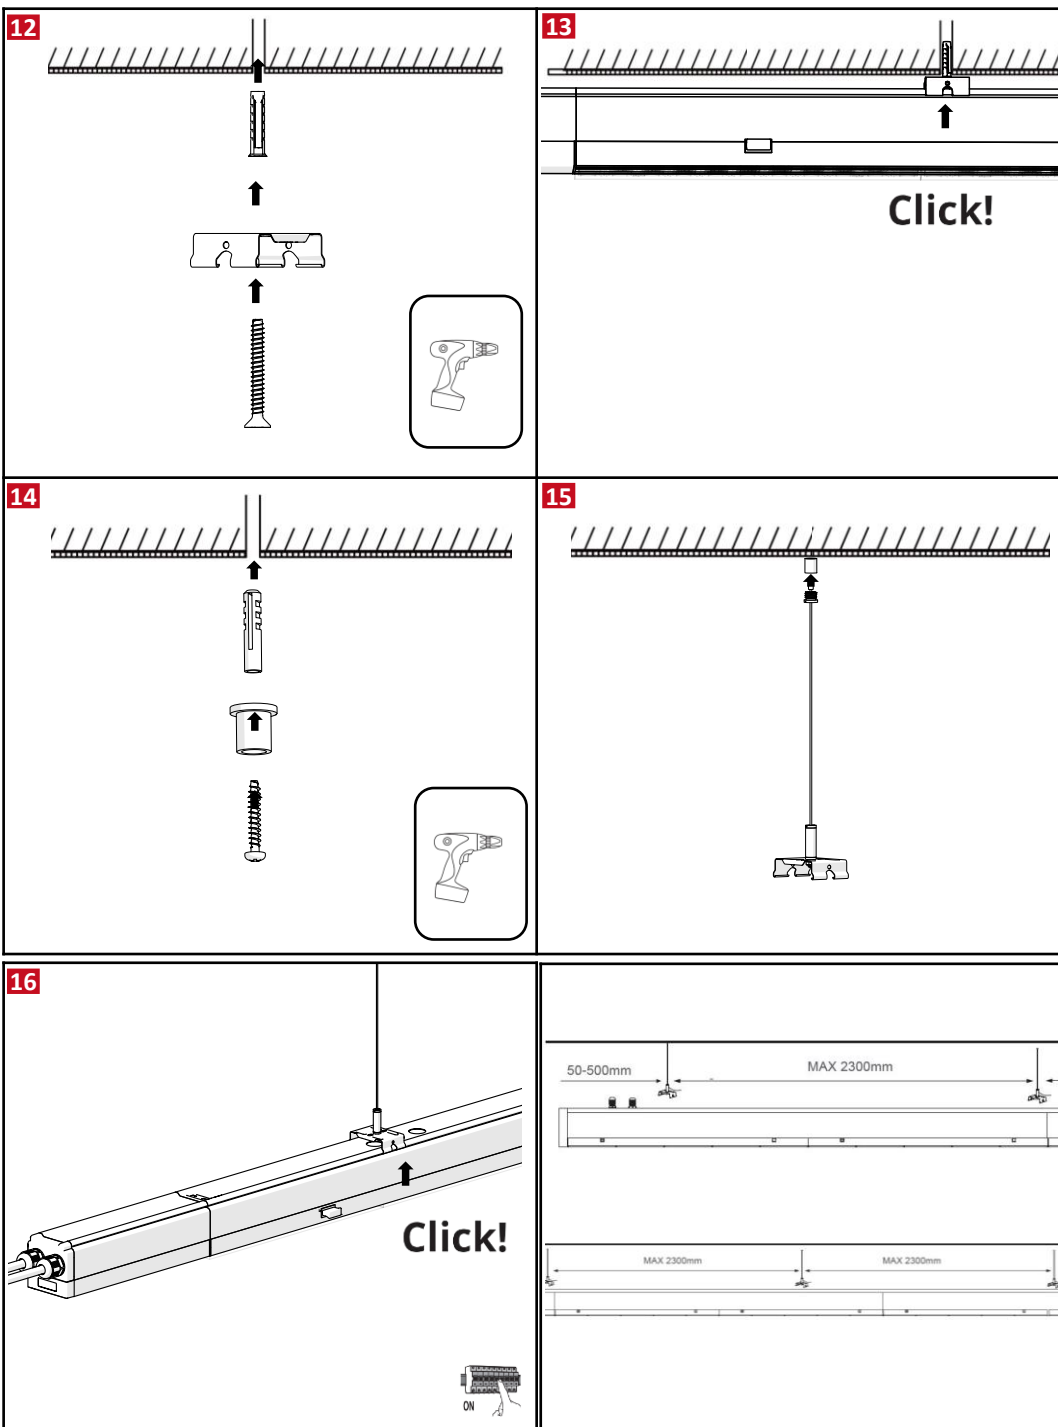


[www.resistex-sa.com](http://www.resistex-sa.com)

RESISTEX EXPLOITATION, 11 Quai de la Banquière CS 80010, 06730 Saint-André-de-la-Roche – France

Tél. 04 93 276 276 - Fax 04 93 276 280 - [contact@resistex-sa.com](mailto:contact@resistex-sa.com)

APE 2740Z - Siret 487 593 477 00010 - SAS CAPITAL 649979 € - T.V.A. F.R. 73 487 593 477

**rēsistex**

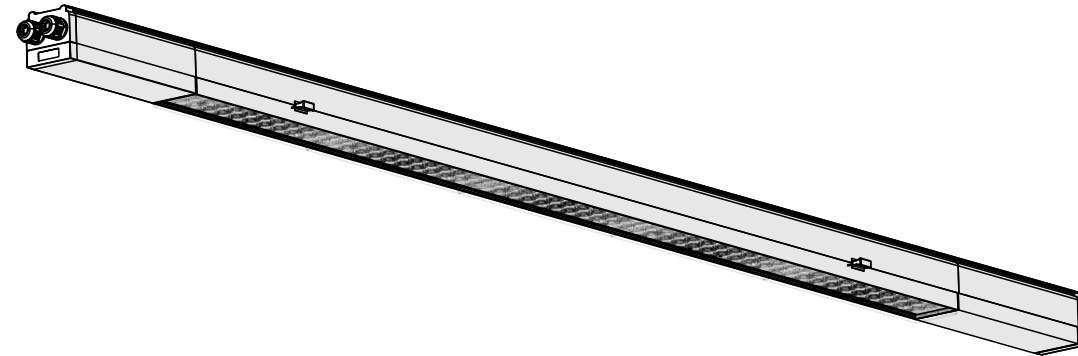

V3.2 - 05.24

# Hyperline

FR Notice d'installation

EN Installation Instructions

## Consignes de sécurité

- Ne travaillez jamais sur le luminaire lorsque celui-ci est sous tension.
- L'installation doit être réalisée par un installateur professionnel dans le respect des normes et des réglementations portant sur les installations électriques.
- Risque de décharges électrostatiques. (Norme ESD). Manipuler en prenant les précautions nécessaires.
- Veuillez respecter les indications et les étapes de montage.



## Entretien

- Ne pas utiliser de produits chimiques ou abrasifs pour nettoyer le luminaire.
- Veuillez conserver ce manuel d'installation pour la dépose ou pour les travaux de maintenance ultérieurs. Vous pouvez consulter des informations complémentaires concernant les luminaires **RESISTEX** sur le site internet [www.Resistex-sa.com](http://www.Resistex-sa.com).



**RESISTEX** ne saurait être tenu pour responsable de toute mauvaise utilisation du produit.

## Safety notes

- Never work when voltage is present on the luminaire.
- The installation must be performed by a professional installer in compliance with the standards and regulations relating to electrical installations
- Risk of electrostatic discharges. (ESD Norm). Handle with precautions.
- Please observe the notes and steps described in the mounting instructions.







## Maintenance instructions

- Do not use chemicals or abrasives products to clean the fixture.
- Keep these instructions for dismantling or future maintenance. You can consult additional information about **RESISTEX** luminaires on the website [www.resistex-sa.com](http://www.resistex-sa.com).



**RESISTEX** cannot be responsible for any misuse of the product.



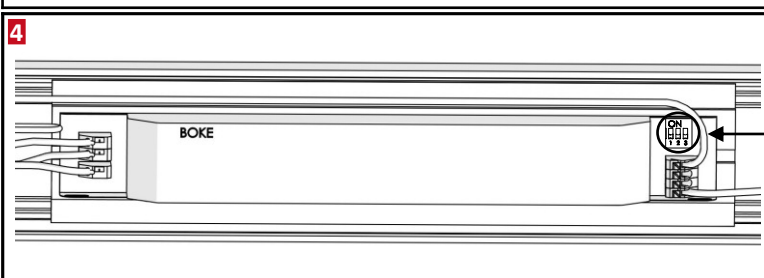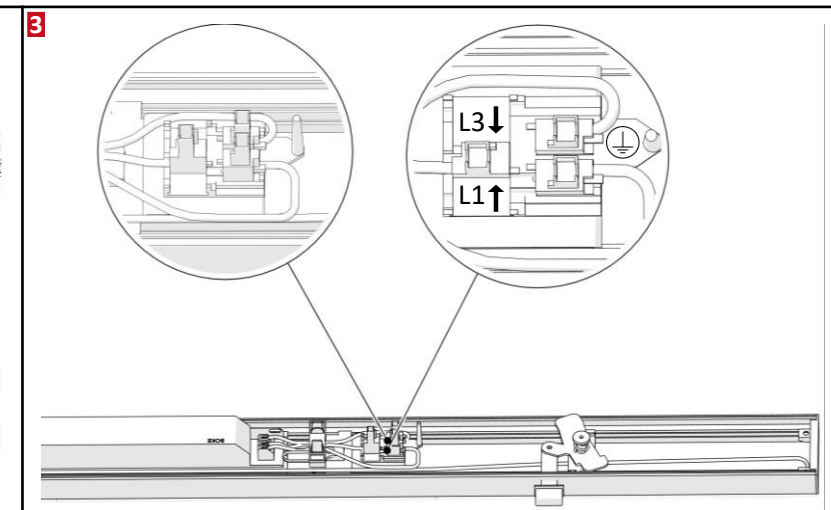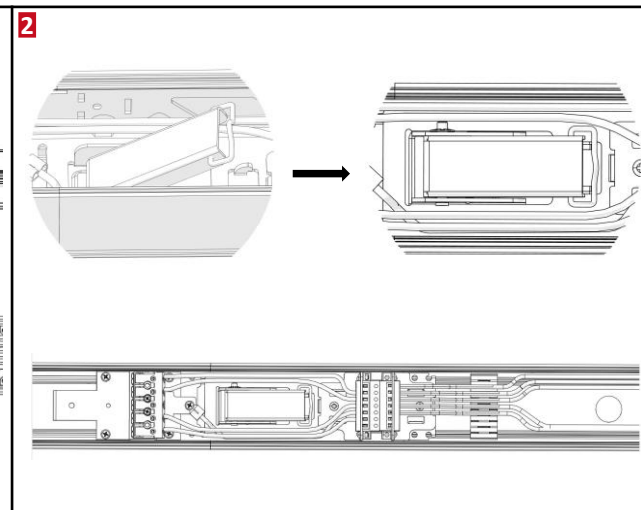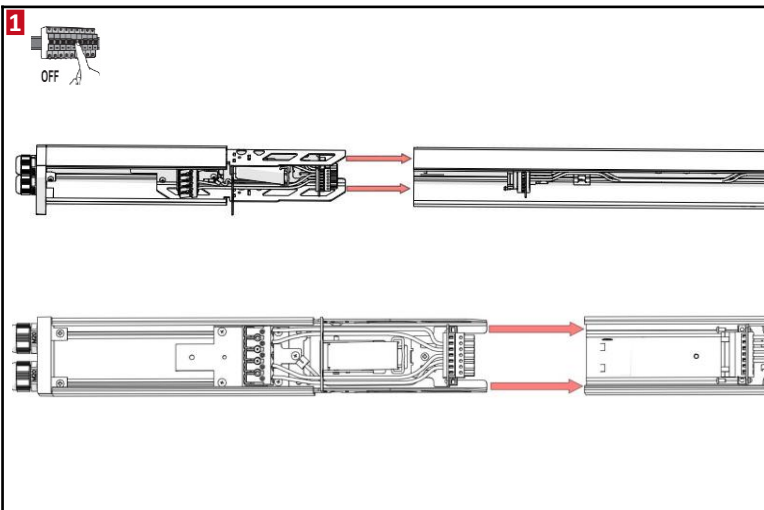

**5**

ON

1 2 3

BK-BEN060-A0350AS

| Pin(W)<br>typ. | Prated(W) | Output<br>Irated(mA) | Voltage(Vdc) | 1  | 2  | 3  | POWER |
|----------------|-----------|----------------------|--------------|----|----|----|-------|
| 44.0           | 40.0      | 200                  | 100-200      | -- | -- | ON | 32W   |
| 54.6           | 50.0      | 250                  | 100-200      | -- | ON | -- | 40W   |
| 65.2           | 60.0      | 300                  | 100-200      | ON | -- | -- | 50W   |
| 65.4           | 60.2      | 350 ★                | 100-172      | -- | -- | -- | 60W   |

**6**

Philips 65W

ON

1 2

| Pin 1 | Pin 2 | Wattage |
|-------|-------|---------|
| ON    | ON    | 65W     |
| ON    | OFF   | 55W     |
| OFF   | ON    | 46W     |
| OFF   | OFF   | 37W     |

